绍兴市上虞西夫韦消防器材有限公司
地址:绍兴市上虞区小越镇吴山村紫金路
电话：+86-13857558436
传真：+86-575-82035598
邮箱：daveye@safewayfighting.com
网址:www.safewayfirefighting.en.alibaba.com

Shaoxing City Shangyu Safeway Fire Fighting Equipment Co.,Ltd
ADD:Zijin Road Wushan Village Xiaoyue Town Shangyu,
Shaoxing City, Zhejiang Province 312367
TEL:+86-13857558436
FAX:+86-575-82035598
E-mail：daveye@safewayfighting.com
Website:www.safewayfirefighting.en.alibaba.com

SAFEWAY

绍兴市上虞西夫韦消防器材有限公司

SHAOXING CITY SHANGYU SAFEWAY FIRE FIGHTING EQUIPMENT CO.,LTD

目录 CONTENT

公司简介 Company Profile 01

干粉灭火器 Dry Powder Fire Extinguisher 02–03

推车式干粉灭火器 Wheeled Dry Powder Fire Extinguisher 04

二氧化碳灭火器 Carbon Dioxide Fire Extinguisher 05

推车式二氧化碳灭火器 Wheeled CO2 Fire Extinguisher 06

清水泡沫灭火器 Water & Foam Fire Extinguisher 07

自动式灭火器 Automatic Dry Powder Fire Extinguisher 07

CE/BSI EN3证书灭火器 CE/BSI EN3 Certificated Fire Extinguisher 08–11

船用灭火器 Marine Fire Extinguisher 12

灭火器配件 Fire Extinguisher Accessories 13–14

消防水带 & 接扣 & 喷枪 Fire Hose & Coupling & Nozzle 15–16

消防箱 & 消防卷盘 Fire Hose Cabinet & Fire Hose Reel 17

绍兴市上虞西夫韦消防器材有限公司成立于2007年，是一家生产与研发各类灭火器、消防配件、以及对外贸易一体的新兴民营企业。工厂座落于329国道边上，宁波机场40分钟，上海机场2个小时可以直达。厂房占地面积10000平方米。我们在上海也设立了一个销售分公司。

公司以技术为核心，视质量为生命，建立了严格的质量管理体系，所有灭火器以及消防配件完全按照CE和BSI EN3 标准进行生产，在国内外市场上赢得了良好的信誉，产品深受广大客户青睐。

Established in 2007, Shaoxing City Shangyu Safeway Fire Fighting Equipment Co.,Ltd is a professional manufacturer and exporter which design, develop production of fire extinguisher and fire fighting equipment in China. The factory is located nearby No.329 National Highway, very near to Ningbo and Shanghai airport, which provides us with convenient transportation. Covers an area of 10,000m²with 100workers. Also we set up domestic & trade sales office in Shanghai.

Some of our fire extinguisher approved CE 0036 & 0062 ,BS EN3, DNV and MED. Welcome OEM service.

Our fire extinguishers include ABC&BC dry powder FE, carbon dioxide FE, water & foam FE, automatic and trolley type FE.

Fire fighting equipment mainly includes fire extinguisher valve, fire hydrant, spray nozzle, fire hydrant valve, fire hose and coupling, fire cabinet ,fire hose reel, fire blanket, fire sprinkler, fire alarm & FM200 and other fire fighting system.

Our company takes technology as our core,regarding quality as the life. We have a strict quality management system to ensure the quality, winning the good reputation in domestic and foreign markets, favored by customers.

干粉灭火器（常规带脚圈）
DRY POWDER FIRE EXTINGUISHER(FOOT RING)

■参数 Product Specification

型号 Item No	SWDP-500g	SWDP-01	SWDP-02	SWDP-03	SWDP-04	SWDP-05	SWDP-06	SWDP-08	SWDP-09	SWDP-10	SWDP-12
规格 Capacity	500g	1kg	2kg	3kg	4kg	5kg	6kg	8kg	9kg	10kg	12kg
外径 Out-Diameter	66mm	90mm	110mm	130mm	130mm	145mm	162mm	180mm	182mm	183mm	180mm
瓶高 Cylinder Height	270mm	235mm	305mm	345mm	395mm	520mm	406mm	460mm	500mm	540mm	600mm
灭火剂含量 Powder Weight	500g	1kg	2kg	3kg	4kg	5kg	6kg	8kg	9kg	10kg	12kg
温度范围 Temperature Range	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃
最大工作压力 Max Working Pressure	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	42.3x42.3 x31.3CM / 25PCS	21×51×31CM/ 10PCS	35.5×23.5×40CM/ 6PCS	28×14×45.5CM/ 2PCS	14×14×48CM/PC	17×17×51CM/PC	17.5×17.5×51.5CM/PC	20×20×55CM/PC	20×20×62CM/PC	19x19x62CM/PC	21×21×68CM/PC
毛重 Gross Weight	19kg	16kg	19.5kg	9.5kg	6.4kg	7.5kg	8.5kg	11kg	12.3kg	13kg	16.5kg

干粉灭火器（常规带脚鼎）
DRY POWDER FIRE EXTINGUISHER(CONVEX FOOT)

■参数 Product Specification

型号 Item No	SWDC-1	SWDC-2	SWDC-3	SWDC-4	SWDC-5	SWDC-6	SWDC-9	SWDC-12
规格 Capacity	1kg	2kg	3kg	4kg	5kg	6kg	9kg	12kg
外径 Out-Diameter	90mm	110mm	130mm	130mm	145mm	162mm	182mm	180mm
瓶高 Cylinder Height	235mm	305mm	345mm	395mm	520mm	406mm	500mm	600mm
灭火剂含量 Powder Weight	1kg	2kg	3kg	4kg	5kg	6kg	9kg	12kg
温度范围 Temperature Range	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃
最大工作压力 Max Working Pressure	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	21×51×31CM/10PCS	35.5×23.5×40CM/6PCS	28×14×45.5CM/2PCS	14×14×48CM/PC	17×17×51CM/PC	17.5×17.5×51.5CM/PC	20×20×62CM/PC	21×21×68CM/PC
毛重 Gross Weight	16kg	19.5kg	9.5kg	6.4kg	7.5kg	8.5kg	12.3kg	16.5kg

推车式干粉灭火器
WHEELED DRY POWDER FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	SWWD-25	SWWD-30	SWWD-35	SWWD-50	SWWD-70	SWWD-100
规格 Capacity	25kg	30kg	35kg	50kg	70kg	100kg
外径 Out-Diameter	300mm	270mm	300mm	320mm	350mm	400mm
瓶高 Cylinder Height	650mm	740mm	700mm	877mm	970mm	1030mm
灭火剂含量 Powder Weight	25kg	30kg	35kg	50kg	70kg	100kg
温度范围 Temperature Range	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃
最大工作压力 Max Working Pressure	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	40×60×90CM/PC	38×55×91CM/PC	43×47×75CM/PC	45×59×110CM/PC	38×55×91CM/PC	61×52×120CM/PC
毛重 Gross Weight	50kg	55kg	65kg	80kg	100kg	160kg

二氧化碳灭火器（碳钢）
CO2 FIRE EXTINGUISHER(CARBON STEEL)

■参数 Product Specification

型号 Item No	SWCO-2	SWCO-2.3	SWCO-3	SWCO-4.5	SWCO-5	SWCO-6	SWCO-7	SWCO-9
规格 Capacity	2kg	2.3kg	3kg	4.5kg	5kg	6kg	7kg	9kg
外径 Out-Diameter	114mm	114mm	114mm	152mm	152mm	152mm	152mm	152mm
瓶高 Cylinder Height	420mm	470mm	600mm	520mm	570mm	660mm	750mm	940mm
灭火剂含量 Powder Weight	3.0L	3.5L	4.5L	6.72L	7.5L	9L	10.5L	13.5L
温度范围 Temperature Range	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃
最大工作压力 Max Working Pressure	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar
测试压力 Test Pressure	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar
材料 Material	CK45	CK45	CK45	CK45	CK45	CK45	CK45	CK45
包装尺寸 Carton Size	28.5×14×53 CM/2PCS	28.5×14×58 CM/2PCS	28.5×14×71 CM/2PCS	17×17×64 CM/PC	22×17×70 CM/PC	22×16×78 CM/PC	21×17×88 CM/PC	21×17×110 CM/PC
毛重 Gross Weight	15kg	17kg	22kg	16.5kg	18.7kg	19.65kg	22.65kg	30kg

推车式二氧化碳灭火器
WHEELED CO2 FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	SWTC-10	SWTC-20	SWTC-25	SWTC-30	SWTC-50
规格 Capacity	10kg	20kg	25kg	30kg	50kg
外径 Out-Diameter	152mm	219mm	219mm	232mm	279mm
瓶高 Cylinder Height	1070mm	1160mm	1245mm	1100mm	1640mm
灭火剂含量 Powder Weight	15L	34L	38L	50L	80L
温度范围 Temperature Range	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃
最大工作压力 Max Working Pressure	167Bar	167Bar	167Bar	167Bar	167Bar
测试压力 Test Pressure	250Bar	250Bar	250Bar	250Bar	250Bar
材料 Material	CK45	CK45	CK45	CK45	CK45
包装尺寸 Carton Size	46×30×120CM/PC	102×48×122CM/PC	102×48×122CM/PC	118×55×124CM/PC	123×62×132CM/PC
毛重 Gross Weight	46kg	100kg	110kg	117kg	207kg

水基型灭火器（清水泡沫灭火器）
WATER & FOAM FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	SWWF-3	SWWF-4	SWWF-6	SWWF-9
规格 Capacity	3L	4L	6L	9L
外径 Out-Diameter	130mm	130mm	162mm	185mm
瓶高 Cylinder Height	410mm	395mm	406mm	520mm
温度范围 Temperature Range	0~60℃	0~60℃	0~60℃	0~60℃
最大工作压力 Max Working Pressure	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12
包装尺寸 Carton Size	14×14×51CM/PC	14×14×49CM/PC	17.5×17.5×51CM/PC	20×20×63CM/PC
毛重 Gross Weight	5.3kg	6.4kg	8.5kg	12.5kg

自动式灭火器
AUTOMATIC DRY POWDER FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	SWDA-3	SWDA-6	SWDA-9	SWDA-12
规格 Capacity	3kg	6kg	9kg	12kg
外径 Out-Diameter	180mm	270mm	302mm	302mm
瓶高 Cylinder Height	240mm	205mm	245mm	275mm
温度范围 Temperature Range	-30~+60℃	-30~+60℃	-30~+60℃	-30~+60℃
最大工作压力 Max Working Pressure	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar
材料 Material	DC01/St12	DC01/St12	DC01/St12	DC01/St12
包装尺寸 Carton Size	25×25×26CM/PC	28×28×23CM/PC	31×31×33CM/PC	31×31×35CM/PC
毛重 Gross Weight	5.1kg	9.0kg	12.5kg	19.5kg

CE/BSI EN3认证灭火器
CE/BSI EN3 CERTIFIED FIRE EXTINGUISHER

■ 1.BSI EN3认证干粉灭火器/BSI EN3 CERTIFIED DRY POWDER FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	SWDPN-01	SWDPN-02	SWDPN-06	SWDPN-09	SWDPN-12
规格 Capacity	1kg	2kg	6kg	9kg	12kg
外径 Out-Diameter	85mm	110mm	150mm	180mm	184mm
瓶高 Cylinder Height	280mm	315mm	480mm	490mm	581mm
材料 Material	St12	St12	St12	St12	St12
包装尺寸 Carton Size	21x20.5x37CM/4PCS	42.5x27x44CM/6PCS	17.5 x 16.5 x 56CM/1PC	19.5x19x62CM/1PC	21x21x69CM/1PC
毛重 Gross Weight	8kg	22.2kg	9.0kg	13.7kg	18kg

■ 2.CE认证干粉灭火器/CE CERTIFIED DRY POWDER FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	SWDPN-01	SWDPE-02	SWDPE-03	SWDPE-04	SWDPE-06	SWDPE-09	SWDPE-12
规格 Capacity	1kg	2kg	3kg	4kg	6kg	9kg	12kg
外径 Out-Diameter	85mm	110mm	130mm	130mm	160mm	180mm	180mm
瓶高 Cylinder Height	280mm	315mm	335mm	435mm	444mm	510mm	600mm
材料 Material	St12/DC01	St12/DC01	St12/DC01	St12/DC01	St12/DC01	St12/DC01	St12/DC01
包装尺寸 Carton Size	21x20.5x 37CM/4PCS	42.5x27x 44CM/6PCS	14.5 x 14 x 45CM/1PC	15 x 15 x 54CM/PC	17.5 x 17.5 x 55.5CM/PC	19.5 x 19 x 62CM/PC	19x20x 71CM/1PC
毛重 Gross Weight	8kg	22.2kg	5.2kg	6.8kg	9.0kg	13.7kg	18kg

■ 3.BSI EN3&CE认证CO2灭火器/BSI EN3 & CE CERTIFIED CO2 FIRE EXTINGUISHER

3.1 BSI EN3 认证CO2灭火器/BSI EN3 CERTIFIED CO2 FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	规格 Capacity	外径 Out-Diameter	瓶高 Cylinder Height	材料 Material	最小壁厚 Min Wall-thickness	包装尺寸 Carton Size	毛重 Gross Weight
SWCON-2	2kg	103mm	470mm	34CrMo4	2.0mm	16x12x59CM/PC	5kg
SWCON-5	5kg	136mm	650mm	34CrMo4	2.6mm	21.5x14.5x77CM/PC	14kg

3.2 CE 认证 CO2 灭火器/CE CERTIFIED CO2 FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	规格 Capacity	外径 Out-Diameter	瓶高 Cylinder Height	材料 Material	最小壁厚 Min Wall-thickness	包装尺寸 Carton Size	毛重 Gross Weight
SWCON-2	2kg	103mm	470mm	34CrMo4	2.0mm	17x13x52CM/PC	5kg
SWCON-5	5kg	136mm	665mm	34CrMo4	2.6mm	21.5x14.5x78.5CM/PC	14kg

■ 4.BSI EN3&CE认证 水基灭火器/BSI EN3&CE CERTIFIED WATER&FOAM FIRE EXTINGUISHER

4.1 BSI EN3&CE认证 泡沫灭火器/BSI EN3&CE CERTIFIED FOAM FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	规格 Capacity	外径 Out-Diameter	瓶高 Cylinder Height	材料 Material	最小壁厚 Min Wall-thickness	包装尺寸 Carton Size	毛重 Gross Weight
SWF-1	1L	85mm	270mm	St12	0.8mm	21X20.5X37CM/4PCS	8kg
SWF-2	2L	110mm	317mm	St12	1.08mm	42.5x27x44CM/6PCS	22kg
SWF-6	6L	162mm	448mm	St12	2.0mm	17.5x17x56.5CM/PC	10.3kg
SWF-9	9L	184mm	519mm	St12	2.6mm	20.5x20x63.5CM/PC	14.5kg

4.2 BSI EN3 & CE认证 清水灭火器/BSI EN3 & CE CERTIFIED WATER FIRE EXTINGUISHER

■参数 Product Specification

型号 Item No	规格 Capacity	外径 Out-Diameter	瓶高 Cylinder Height	材料 Material	最小壁厚 Min Wall-thickness	包装尺寸 Carton Size	毛重 Gross Weight
SWW-6	6L	162mm	448mm	St12	2.0mm	17.5x17x56.5CM/PC	10.3kg
SWW-9	9L	184mm	519mm	St12	2.6mm	20.5x20x63.5CM/PC	14.5kg

■ 5.CE/SGS认证球形灭火器/CE/SGS CERTIFIED FIRE EXTINGUISHER BALL

Model No.	SWAFO-01
Weight of extinguishing powder mixture	1.3+/-0.2Kg
Total weight of the agent	1.5+/-0.2Kg
NEC	4.0g
Diameter	147mm
Warning audio signal	120dB(Impulse Noise)
Activation time	3-10 sec with flame
Effective extinguish area	1.3Kg-3 cubic meter
Life span	5 years
Certificates	CE, Rohs(SGS)

SPECIFICATIONS:

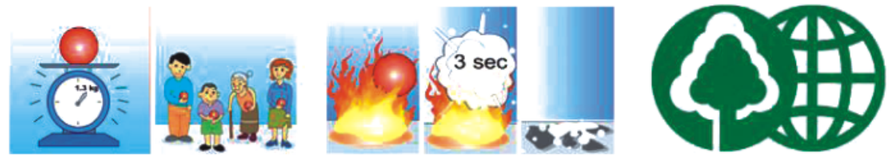

- Light weight – Only 1.3 kg, children and elderly people can use it easily.
- Easy use– Just throw it into the fire or install it in any fire risk areas.
- Wide application – Suitable for many places
- Safe to use – No need to get close to the fire.
- Non-toxic to the environment – Fire Extinguisher Ball is made from human and environmental friendly materials.
- No need special maintenance– For a period of 5 years without maintenance required, always on guard for you with its unique capability to emit loud noise less than 140dB as a fire alarm upon activation

船用灭火器系列
MARINE FIRE EXTINGUISHER SERIES

手提贮气式干粉灭火器
Portable dry powder fire extinguisher with propellant gas cartridge
型号 Type:PDF/ABC-6, PDF/ABC-9, PDF/ABC-12
认可机构 Approval:MED/CCS
灭火剂 Extinguisher agent:ABC
置放温度 Ambient temperature:-20~+60℃
材料 Material: Steel St14
外径 Out-diameter:160mm,180mm,190mm
外包装 Outer packing:17×17×56(cm),20×20×71(cm),20×20×71(cm)
重量 Weight:9.8kg,14.3kg,18.5kg

手提贮压式干粉灭火器
Portable dry powder fire extinguisher
型号 Type:MF-2, MF-6, MF-9, MF-12
认可机构 Approval:MED/CCS
灭火剂 Extinguisher agent:ABC
置放温度 Ambient temperature:+5~+60℃
材料 Material: Steel St14
外径 Out-diameter:110mm,160mm, 182mm, 180mm
外包装 Outer packing:12×12×41(cm),17×17×54(cm),20×20×59(cm), 20×20×69(cm)
重量 Weight:3.19kg,10.2kg,15.6kg,18.6kg

推车式贮气瓶式泡沫灭火器
Gas cartridge & wheeled foam fire extinguisher
型号 Type: MPT-45,MPT-135
认可机构 Approval:MED/CCS
灭火剂 Extinguisher agent: Foam
置放温度 Ambient temperature:+5~+60℃
材料 Material: Steel HP235
外径 Out-diameter:356mm,410mm
外包装 Outer packing:100×90×59(cm),160×100×63(cm)
重量 Weight:135kg,300kg

推车式贮气干粉灭火器
Gas cartridge & wheeled dry powder fire extinguisher
型号 Type:MFT-25, MFT-50
认可机构 Approval:MED/CCS
灭火剂 Extinguisher agent:ABC
置放温度 Ambient temperature:+5~+60℃
材料 Material: Steel HP235
外径 Out-diameter:260mm,356mm
外包 Outerpacking:100×90×59(cm),100×90×59(cm)
重量 Weight:105kg,135kg

手提二氧化碳灭火器
Portable carbon dioxide fire extinguisher
型号 Type:MT-5, MT-7
认可机构 Approval:MED/CCS
灭火剂 Extinguisher agent:CO2
置放温度 Ambient temperature:-20~+60℃
材料 Material:CK45
外径 Out-diameter:152mm,152mm
外包装 Outer packing:22×16×70(cm),22×16×88(cm)
重量 Weight:16.41kg,23.8kg

推车式二氧化碳灭火器
Wheeled CO2 fire extinguisher
型号 Type:MTF-20
认可机构 Approval:MED/CCS
灭火剂 Extinguisher agent:CO2
置放温度 Ambient temperature:-20~+60℃
材料 Material: Carbon steel CK45
外径 Out-diameter:219mm
外包装 Outer packing:102×48×122(cm)
重量 Weight:86.2kg

灭火器配件
FIRE EXTINGUISHER ACCESSORIES

Gauges 1	**Gauges 2**	**Dip Tube**	**Safety Seals & Pin** 
Binding	**Bracket**	**Wall Hook**	**Hose**
CO2 Hose & Horn	**Nozzle**	**Foam Spray Gun -1 (Wheeled Type)**	**Powder Spray Gun-2 (Wheeled Type)**
Neck Ring	**Pendent Sprinkler**	**Upright Sprinkler**	**UL Certified-DN 15/20**

灭火器配件及消防设备
FIRE EXTINGUISHER ACCESSORIES & FIRE FIGHTING EQUIPMENT

CO2 Valve 1	CO2 Valve 2	CO2 Valve 3	Dry Powder Valve 1
Dry Powder Valve 2	Dry Powder Safety Valve	Automatic FE Valve	Soft Bag Fire Blanket
Hard Case Fire Blanket	Fireman Suit	Fire Bucket	Smoke Detector
Fire Axe	CO2 Cylinder	Normal Powder Cylinder	Certified Powder Cylinder

消防水带
FIRE HOSE

Inner Dia(Inch)	Working Presssure (Mpa/BAR/PSI)	Test Pressure (Mpa/BAR/PSI)	Burst Pressure (Mpa/BAR/PSI)	Length(Feet/M)
1"	0.8/8/120	1.2/12/180	2.4/24/360	33/10 55/15 66/20 100/30 164/50
1-1/2"	1.0/10/150	1.5/15/220	3.0/30/450	
1-3/4"	1.3/13/190	2.0/20/300	3.9/39/580	
2"	1.6/16/240	2.4/24/360	4.8/48/720	
2-1/2"	2.0/20/300	3.0/30/450	6.0/60/900	
2-3/4"	2.5/25/360	3.8/38/550	7.5/75/1100	
3"	3.0/30/450	4.5/45/650	9.0/90/1300	

Fire hose type:
NR,EPDM,Synthetic rubber,PVC,PU,Durable and double jacket fire hose
Material:
High tenacity filament polyester or nylon filament
Working pressure:
8BAR–30BAR/120PSI–450PSI
Character:
Easy rolling, aging resistance,good and inexpensive,long service life,high pressure resistance
Main usage:
Used in industry and mining enterprice ,dock,petrochemical,agricultural,fire fighting

消防接扣，消防栓，消防水枪
FIRE HOSE COUPLING，FIRE HYDRANT,FIRE HOSE NOZZLE

▲STORZ TYPE 德式接扣

Type 型号	Length 长度(mm)	Material 材质	Standard 符合标准
DHS40 (1.5")	105±5	Lead Brass/Aluminum 铅黄铜/铝	DIN 14302
DHS50 (2")	125±5		
DHS65 (2.5")	145±5		

▲AMERICAN TYPE 美式接扣

Type 型号	Length 长度(mm)	Material 材质	Standard 符合标准
DHA40 (1.5")	109±5	Lead Brass/Aluminum 铅黄铜/铝	ANSI B:181-1
DHA50 (2")	145±5		
DHA65 (2.5")	147±5		

▲JOHN MORRIS TYPE 英式接扣

Type 型号	Length 长度(mm)	Material 材质	Standard 符合标准
DHJ40 (1.5")	140±5	Lead Brass/Aluminum 铅黄铜/铝	BS 336
DHJ50 (2")	145±5		
DHJ65 (2.5")	155±5		

▲FIRE HYDRANT&FIRE HYDRANT VALVE&FIRE NOZZLE

90°Storz Flange Fire Hydrant 40/50/65mm	**Machino Fire Hydrant 40/50/60mm**	**Machino Flange Fire Hydrant 40/50/65mm**	**45°John Morris Fire Hydrant 40/50/65mm**
Storz Male and Female Thread	**Connection Coupling**	**Brass Spanner**	**Brass Cap**
Fire Hydrant	**Fire Nozzle**	**Spray Nozzle**	**Adjust Flow Nozzle**

消防箱
FIRE HOSE CABINET

SW-FC-01
Dimension:700x250x230,760x200x230,860x280x260mm
Material: Mild steel,mesh glass window
Finish: Red epoxy electrostatic powder coated
Mounting: Wall surface & floor stand
Capacity: Fire extinguisher up to 12kg

SW-FC-02
Dimension:150×75×28,150×75×30mm
Material: Mild steel
Finish: Red epoxy electrostatic powder coated
Mounting: Wall surface or recessed & Vertical
Capacity: Hose reel 1"×30m+ Extinguisher 6KG×3pcs

SW-FC-03
Dimension:60×60×16, 65×65×22mm
Material: Mild steel
Finish: Red epoxy electrostatic powder coated
Mounting: Wall surface
Capacity: Hose reel 1½"–2½"×30m with basket

SW-FC-04
Dimension:1050x800x240,1050x750x280mm
Material: Mild steel,wild glass window
Finish: Red epoxy electrostatic powder coated
Mounting: Wall surface
Capacity: Hose reel 1"×30m+Fire extinguisher up to 9kg

SW-FC-05
Dimension:105×80×24,105×80×28mm
Material: Mild steel & 304
Finish: Body powder coated &Face hair line S/S
Mounting: Wall recess & Horizontal
Capacity: Hose reel 1"×30m+ Extinguisher 6KG

消防卷盘
FIRE HOSE REEL

SW-FR-01
Capacity: 1"×30m,3/4"×30–45M
Side plate diameter: 500/525/550/600mm
Side plate thickness:1.0/1.2mm
Effective range:≥6M
Min flowage:≥24L/min
Type: Manual Swing

SW-FR-02
Capacity: 1"×25–30m,3/4"×25–36M
Side plate diameter: 525/550/600mm
Side plate thickness:1.0/1.2mm
Effective range:≥6M
Min flowage:≥24L/min
Type: Automatic, Fixed & Swing

SW-FR-03
Capacity: 3/4"×25M
Side plate diameter: 435mm
Side plate thickness:0.8mm
Effective range:≥6M
Min flowage:≥24L/min
Type: Manual,Swing

SW-FR-04
Capacity: 1"×25–30m,3/4"×25–30M
Side plate diameter: 470/480/550/600mm
Side plate thickness:1.0/1.2mm
Effective range:≥6M
Min flowage:≥24L/min
Type: Manual, Fixed

SW-FR-05
Capacity: 3/4"×30M
Side plate diameter: 450mm
Side plate thickness:0.8mm
Effective range:≥6M
Min flowage:≥24L/min
Type: Swing